


Rated for continuous
use at -20°C to +60°C.

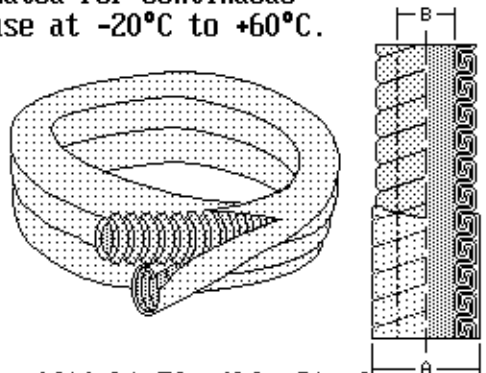

Liquidtight Flexible Steel
Conduit, Special PUC-Jacket

UL ■ ölbeständig ■

METALLIC FLEX CONDUIT

-20°C to +60°C

Intermitting to +90°C

■ Spezialaußenmantel ■

Stahl-Schutzschlauch, Kunststoffmantel, flexibel

UPE=Packed

Nom.	Cat.No.	UPE	A	B	BendRad	Description (3/8 to 4)
3/8	LA/LOR-10	30m	17.8	12.5	76.2	Offers outstanding protection in chemically hazardous environments. Unaffected by most toxic chemicals, sunshine, salt air and spray etc. LA-LOR is OIL RESISTANT.
1/2	LA/LOR-11	30m	21.1	16.1	88.9	
3/4	LA/LOR-12	30m	26.4	21.1	127.0	
1	LA/LOR-13	30m	33.1	26.8	152.4	
1 1/4	LA/LOR-14	15m	41.8	35.4	177.8	
1 1/2	LA/LOR-15	15m	47.8	40.3	139.7	
2	LA/LOR-16	15m	59.9	51.6	177.8	