


Standardfarben: schwarz und weiß

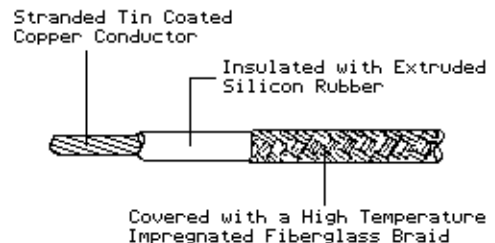

Silikonisolierte, verzinnzte  
Kupferlitze mit Glasfiebergelecht

UL CSA■

600V AC

+200°C

Standard Color  
Black & White

Catalog No	AWG	Circa mm <sup>2</sup>	UL Syle	CSA	Aufbau mm Stranding	Außen Ø mm	MIL-W- 16878
425391■	1/0	53.47	3126	SEW-2	259x0.511	16.26	FF-1/0
425392■	2/0	67.40	3126	SEW-2	259x0.574	17.60	FF-2/0
425393■	3/0	84.97	3126	SEW-2	259x0.645	19.05	--
425394■	4/0	107.17	3126	SEW-2	259x0.724	20.80	FF-4/0