


Standardfarben: schwarz und weiß

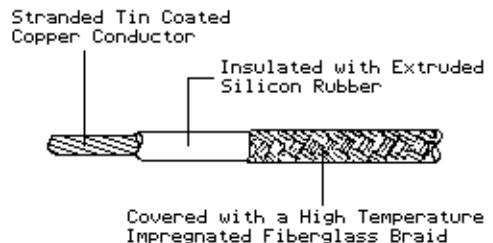

Silikonisierte, verzinnzte
Kupferlitze mit Glasfiebergeflecht

UL CSA#

600V AC

Standard Color

+150°C Black & White

= Sonderanfertigung
Special Made to
Order Item Only

Catalog No	AWG	Circa mm ²	UL Syle	CSA	Aufbau mm Stranding	Außen Ø mm	MIL-W- 16878
425124 #	24	0.21	3069	--	7x0.201	2.79	FF-24*
425122#	22	0.33	3069	SEWF-2	7x0.254	2.92	FF-22*
425120#	20	0.52	3069	SEWF-2	10x0.254	3.12	FF-20*
425118#	18	0.82	3070, SFF-2	SEWF-2	16x0.254	3.43	FF-18*
425116#	16	1.31	3070, SFF-2	SEWF-2	26x0.254	3.73	FF-16*
425114#	14	2.08	3070, SFF-2	SEWF-2	41x0.254	4.11	--

* = Stronger and Heavier Braid: MIL-W-16878D, +200°C, 1000V AC