


Standardfarben: schwarz und weiß

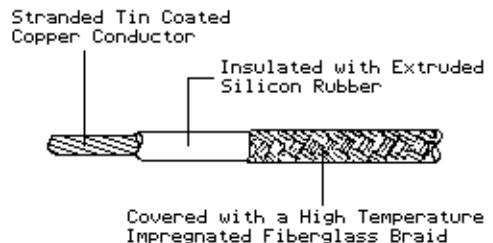

Silikonisolierte, verzinnte  
Kupferlitze mit Glasfiebergelecht

UL            CSA■

600V AC

+200°C

Standard Color  
Black & White

Catalog No	AWG	Circa mm <sup>2</sup>	UL Syle	CSA	Aufbau mm Stranding	Außen Ø mm	MIL-W- 16878
425308■	8	8.35	3125	SEW-2	70x0.404	8.46	--
425306■	6	13.29	3125	SEW-2	114x0.404	9.60	--
425304■	4	21.14	3125	SEW-2	133x0.455	10.64	FF-4
425302■	2	33.61	3125	SEW-2	259x0.404	12.40	FF-2
425301■	1	42.38	3126	SEW-2	259x0.455	15.06	FF-1