


Dimensions
= mm

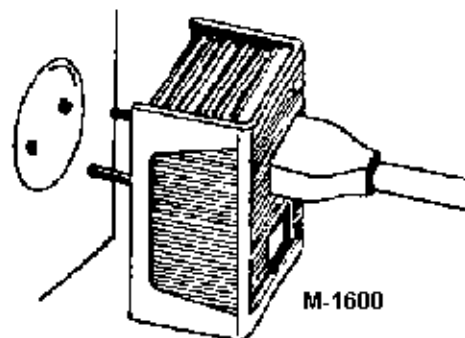

CONVERTER 50/60 Hz

Konverter 2-polig ohne Erde, mit Reisebeutel, Absicherung gegen Überhitzung, #M-1750 umschaltbar LO 0-50W, HI 50-1750W

Converter 2-Pole 2-Wire Non-Grounding, Travel Pouch Included, Thermal Protected, #M-1750 with Selector Switch provides two different settings: LO 0-50W, HI 50-1750W

Catalog Number	Description	Input	Output	Watt	UPE/Packed
F-11	Converter	220/240Vac	110/120Vac	50 max.	24
M-1600	Converter	220/240Vac	110/120Vac	50-1600	24
M-1750	Dual-Converter (Select Switch)	220/240Vac 220/240Vac	110/120Vac 110/120Vac	50 max. 50-1750	24