


Cat. No's indicates products of different manufacturers available.

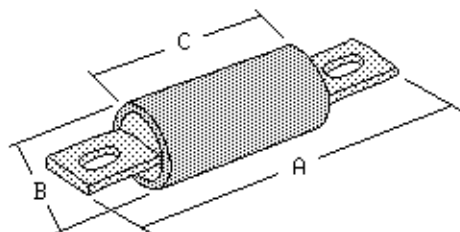

Indicated dimensions only refer to first catalog number listed.

UL 198C CSA ■ HRCI-J

600 V AC

Fast-Acting
UL Class J flink

Interrupting rating
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 70 - 600 Amp.					UPE Packed	Dimensions = mm		
	A	B	C				A	B	C
JLS ■	70	80	90	100		5	117.5	25.4	66.7
JKS ■	110	125	150	175	200	1	146.1	38.1	76.2
A4J ■	225	250	300	350	400	1	181.0	50.8	85.7
CJS ■	450	500	600			1	203.2	63.5	95.3
JCL ■									