


Series range
from 15 to 90 watts.
UL recognized
CSA and TÜV
certified

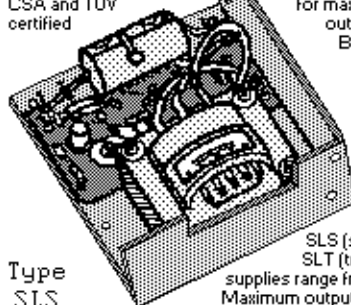

Type
SLS

Designed for bench and rack use.
These units feature the split-
bobbin transformer design
for maximum isolation of
outputs from primary.
Built-in overvoltage
protection, which
provides both
transient and
power supply
malfunction,
is standard on
5 volt models
and optional for
other models.

SLS (single), SLD (dual),
SLT (triple) series power
supplies range from 15 to 90 watts.
Maximum output ratings to +50°C.

UL/UR CSA■ TÜV

DC POWER SUPPLIES

Input 100, 120, 220,
230, 240 VAC, 47-63Hz
Regulation $\pm 0.1\%$
Ripple 3mV max. P-P
DC Adjust. 10 % min.

GEREGELTE DC NETZTEILE

Automatic Current Limiting

Catalog Number	Output 1	Output 2	Output 3	H x W x L		
SLS-05-120-1■	+5V/12A	---	---	70	229	124
SLS-24-036■	+24V/3.6A	---	---	70	178	124
SLD-12-3015-05■	+5V/3A	+12V/1.5A	---	70	178	124
SLT-12-61010-12■	+5V/6A	+12V/1A	-12V/1A	70	229	124

Complete Serie SLS (single) SLD (dual) SLT (triple) on Request