


\*UPE/Put-Up upon Request

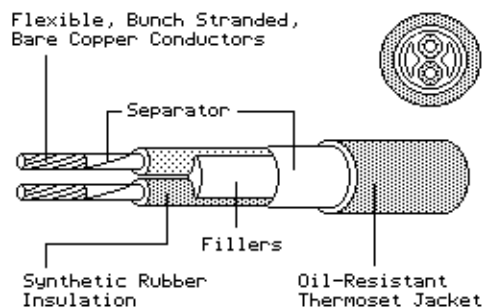

UL: SOW-A CSA: SO (thru 9/C only)

UL 62 CSA MSHA

600V AC Jacket BLACK

+90°C to -37°C

Stranded bare copper,  
EPR insulation, oil  
and sunlight resistant

CatNo.	AWG	Stranding	Insul	Jackt	O.Dia	Amp.	g/m	UPE	MfgID
SO	16/10	26x30 AWG	0.76	2.03	15.5	7.0	455	*	22107
SO	16/12	26x30 AWG	0.76	2.03	16.3	5.0	552	*	22109
SO	16/14	26x30 AWG	0.76	2.41	18.8	5.0	633	*	22110
SO	16/16	26x30 AWG	0.76	2.41	18.9	5.0	724	*	31154
SO	16/18	26x30 AWG	0.76	2.41	19.8	5.0	780	*	32012
SO	16/20	26x30 AWG	0.76	2.41	20.3	5.0	871	*	22111
SO	16/24	26x30 AWG	0.76	2.41	22.0	4.5	998	*	30856
SO	16/30	26x30 AWG	0.76	2.79	24.8	4.5	1310	*	22112