
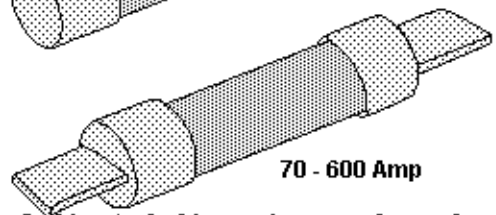


Cat. No's indicates products of different manufacturers available.

0 - 60 Amp

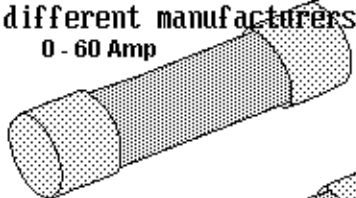

70 - 600 Amp

Indicated dimensions only refer to first catalog number listed.

UL 198C CSA HRCI-MISC

480 V AC

MEDIUM TIME-DELAY

UL Class G mittelträge

FEDERAL SPECIFICATION  
NO. WF1814 (QPL)

Interrupting rating  
100,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 0.125 - 60 Amp.						UPE Packed	Dimensions = mm		
	1/2	1	2	3	4	5		A	B	C
SLC		6	8	10	15		10	33.3	10.3	---
SC AG	20						10	35.7	10.3	---
	25 30						10	41.3	10.3	---
	35 40 45 50 60						10	57.2	10.3	---