


Dimensions
= mm

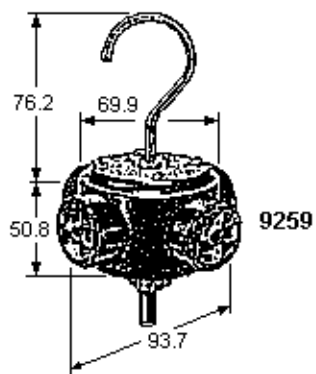

Bell-shaped housing of NEOTEX rubber compounded to retain resiliency at sub-zero temperatures. MAX-LOC (3/4" NPT-F3 connector not included!) compression grip. Recessed yellow plastic outlets or transparent outlets with neon lamp. Hanging bracket included. Wire Mesh Grip optional. Cord range (14.3-19.1)mm (Cordage not included!). Receptacles 2-Poles 3-Wire Grounding, 125 Volts AC.

Catalog No.	NEMA	Amps	Description
34047	5-15	15	Pendant Quad-Tap, 4 Straight-Blade Receptacles
34547	L5-15	15	Pendant Quad-Tap, 4 LOCKING Receptacles
34048	5-20	20	Pendant Quad-Tap, 4 Straight-Blade Receptacles
34047L	5-15	15	Lighted Pendant Quad-Tap, 4 Straight-Blade Receptacles

Please order separately:

Use MAX-LOC 3/4"NPT	5620	4.8- 6.4mm	5536	11.1-14.3mm	5542	15.9-19.1mm
Straight Connectors	5622	6.4- 9.5mm	5538	12.7-15.9mm	5544	17.5-20.6mm
and 3/4"NPT Locknut	5624	9.5-11.1mm	5540	14.3-17.5mm	5602	3/4"Locknut

9259	5-15	15	4-Outlet Cluster, Brown, Phenolic, Steel Cover, Swivel Hook, Cord Grip Range 7.5-14.3mm (Cord not supplied!)
------	------	----	--