

B-J- Product Information

USA / Canada - Industrial Grade Weatherproof Covers

Industrial Grade Weatherproof Covers

SPECIFICATIONS

- Unbreakable Glass-Filled Grey **Polycarbonate Construction**
- Stainless Steel Mounting Screws
- Covers Comply with 2005 NEC Section 406.8(A) and 406.8(B)(2).
- Molded-In Label Area
- Lockable "Bullnose" for OSHA Locktag/Tagout Compliance
- UL Listed, CSA Certified








Catalog No.	Description	Weight/each	VPE/Pack	EDP No.
WPG-1	Weatherproof Cover for Flanged Inlets and Outlets with 1.96" (49.8mm) Diameter max. Opening to Accommodate 15A and 20A Straight Blade, and 15A Locking, Grey	101 g net.	100/10	114476
WPG-2	Weatherproof Cover for Flanged Inlets and Outlets with 2.32" (58.9mm) Diameter max. Opening to Accommodate 20A and 30A Locking, Grey	96 g net.	100/10	114508



FEATURES

- Unbreakable glass-filled polycarbonate
 Covers have lockable "bullnose" for construction to withstand years of job site abuse and harsh environmental exposure. Stainless steel mounting screws also resist corrosion.
- Covers comply with 2005 NEC Section 406.8(A) and 406.8(B)(2).
- Molded-in label area (2.8 sq. in.) for pre-printed or handwritten labels for identification of circuits, ratings, and other application data.
- OSHA locktag/tagout compliance.
- Covers fit all competitive inlets and outlets.
- Pre-attached gaskets for easy installation and tight seal to panel or weatherproof box – with no misaligned or collapsed gaskets.
- Tamper-proof hinge features permanent, locked-in pins for added security.

UL Listed and **CSA** Certified flush device cover plate, wet location only when cover closed and damp locations.

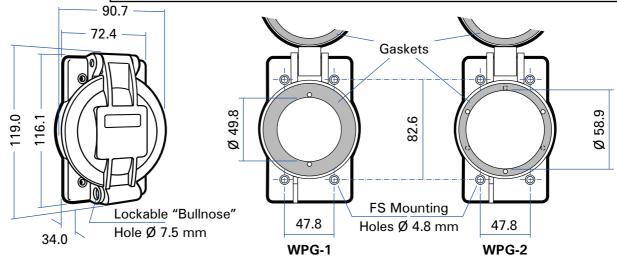

Technical Data are Subject to Change without Notice. Dimensions in mm.