

Brazil - Rewirable Rubber Plug & Connector, 20A, NBR 14136

Rewirable Rubber Plug and Connector, Brazilian Standard,
20 Amp, 250 Volt AC, 2 Pole 3 Wire Grounding

SEGURANÇA



*Wiederanschließbarer Stecker und Kupplung,
Brasilien, 20 Amp, 250 Volt AC, 2P+E*

SPECIFICATIONS

- Ratings: 20 Amp, 250 Volts AC
- 2 Pole 3 Wire Grounding
- According to ABNT NBR NM 60884-1, NBR 14136/2002
- Screw-Type Terminals, Brass
- Material Coverage: Thermoplastic
- Coated with Rubber for the Class I Equipment




PRM9500



PRM8500

Catalog No.	Color	Description	VPE / Packed	Weight / each	EDP No.
PRM8500	Black	Rubber Plug, 20A, 250V AC, Brazil NBR 14136	1000 ea	120 g	126053
PRM9500	Black	Rubber Connector, 20A, 250V AC, Brazil NBR 14136	1000 ea	150 g	126054

TECHNICAL DATA AND DIMENSIONS

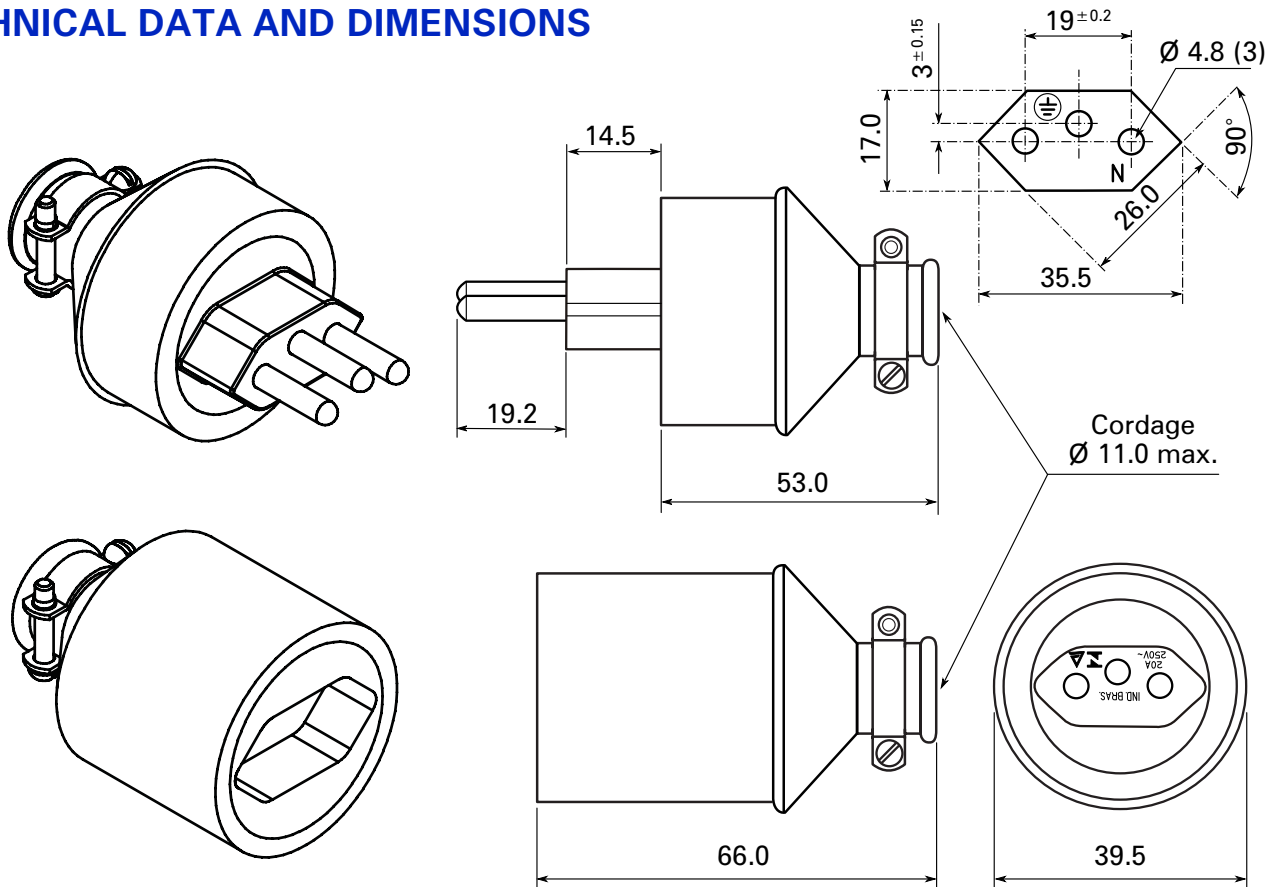

Terminals takes up to 3 x 2.5 mm², cordage outside diameter 11 mm max, used with flexible cordage, join standard 1.5 mm² to 2.5 mm² (2P + E) 20A/250V AC, connect ground wire, connections specified by the appliance or product, mark of conformity of certified products.

Technical Data are Subject to Change without Notice. Dimensions in mm.