

## Argentina Wiring Devices

The standards agency for Argentinian wiring devices is the "Instituto Argentino de Normalización y Certificación" – IRAM

The standard plug for Argentina is defined by:  
 IRAM 2063 – Equipment Class II – 2 Pole, 2 Wire Non-Grounding (2POL)  
 IRAM 2073 – Equipment Class I – 2 Pole, 3 Wire Grounding (2P + E).

The Argentine 10 amp. plug, which is used in Class I applications in Argentina, is similar in appearance to the Australian or Chinese plug.

However, this plug differs greatly from the Australian plug — the pins are longer, the body dimensions change slightly and most importantly, the wiring differs — the positions of the line and neutral contact pins are reversed.

For this reason, great care must be taken when manufacturing equipment for export to both Australia and Argentina, as well as specifying the correct plug, socket, cord or cordset for use with equipment.

The usual Argentine plug is a 3-wire grounded plug, rated at 10A, 250V AC.



102.255 DG



103.273 IV



103.283 IV



774.610 WH



125.267 IV





774.611 WH




103.285 DG

### Selection of popular products

Catalog No.	Color	Description	VPE/Pack	Ship Wght ea	EDP No.
<b>102.255DG</b>	Dark Gray	Rewireable Plug, Angled Cord Entry, 2POL, 10A, 250V AC	500/50	0.040 kg	127784
<b>103.273IV</b>	Ivory	Rewireable Plug, Straight Cord Entry, 2P + E, 10A, 250V AC	400/10	0.055 kg	127785
<b>103.273DG</b>	Dark Gray	Rewireable Plug, Straight Cord Entry, 2P + E, 10A, 250V AC	400/10	0.055 kg	127786
<b>103.283IV</b>	Ivory	Rewireable Plug, Angled Cord Entry, 2P + E, 10A, 250V AC	400/10	0.050 kg	127787
<b>103.283DG</b>	Dark Gray	Rewireable Plug, Angled Cord Entry, 2P + E, 10A, 250V AC	400/10	0.050 kg	127788
<b>103.285IV</b>	Ivory	Rewireable Plug, Angled Cord Entry, 2P + E, 20A, 250V AC	350/10	0.060 kg	126980
<b>103.285DG</b>	Dark Gray	Rewireable Plug, Angled Cord Entry, 2P + E, 20A, 250V AC	350/10	0.060 kg	126979
<b>125.267IV</b>	Ivory	Rewireable Cord Connector, Straight, 2P + E, 10A, 250V AC	450/10	0.045 kg	127790
<b>125.267DG</b>	Dark Gray	Rewireable Cord Connector, Straight, 2P + E, 10A, 250V AC	450/10	0.045 kg	127789
<b>774.610WH</b>	White	Socket Outlet, 2P + E, 10A, 250V AC, with Shutter	250/10	0.080 kg	127791
<b>774.611WH</b>	White	Socket Outlet, 2P + E, 10A, 250V AC, with Shutter & Frame	250/10	0.085 kg	127792
<b>8960-25M-BB</b>	Black	Non-Detachable Power Supply Cord, 2.5m, Plug 10A/250V	2000	0.255 kg	120843
<b>8967-18M-BB</b>	Black	Detachable Cordset, 1.8m, Plug 10A YP-37, IEC 60320/C13	100/20	0.220 kg	123936
<b>8968-18M-BB</b>	Black	Detachable Cordset, 1.8m, Plug 10A YP-37, IEC 60320/C5	100/20	0.220 kg	125298
<b>8969-18M-BB</b>	Black	Detachable Cordset, 1.8m, Plug 10A YP-57, IEC 60320/C7	100/20	0.185 kg	124044

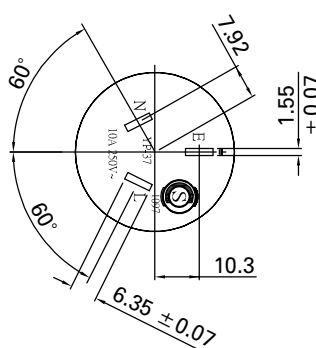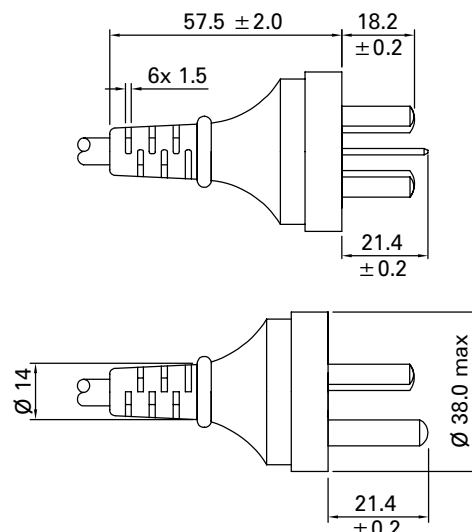

YP-37

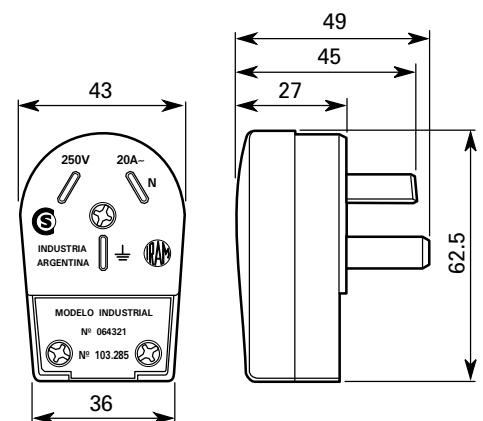

103.285

Technical data and informations are nominal only and subject to change without notice. Dimensions in mm.