


600 Volts

Color Code 3/C: Black, White, Green

UL Type SEOW-A +105°C to -50°C

4/C: Black, White, Red, Green

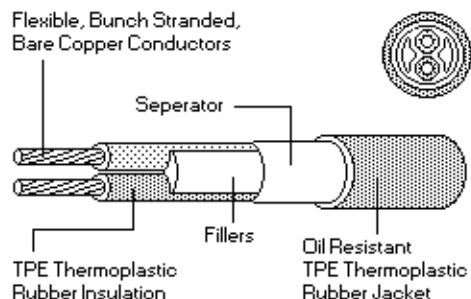

Indoor/Outdoor ♦ Oil and Water Resistant

Catalog No.	Ref.No.	AWG	mm ²	No x Ø	CU kg/km	O.D. Ø	Color	Amp	UPE
SEO 16/3 YEL	03452	16/3	3x 1.32	26x0.254	BC 36	9.9	Yellow	13	76m
SEO 16/4 YEL	03453	16/4	4x 1.32	26x0.254	BC 48	10.7	Yellow	10	76m
SEO 14/3 BLU	03455	14/3	3x 2.08	41x0.254	BC 58	13.5	Blue	18	76m
SEO 14/4 BLU	03456	14/4	4x 2.08	41x0.254	BC 77	14.6	Blue	15	76m
SEO 12/3 RED	03458	12/3	3x 3.29	65x0.254	BC 93	15.4	Red	25	76m
SEO 12/4 RED	03459	12/4	4x 3.29	65x0.254	BC 124	16.7	Red	20	76m
SEO 10/3 GRN	03461	10/3	3x 5.32	104x0.254	BC 148	17.3	Green	30	76m
SEO 10/4 GRN	03462	10/4	4x 5.32	104x0.254	BC 197	18.9	Green	25	76m
SEO 8/3 BLK	03464	8/3	3x 8.51	168x0.254	BC 237	21.3	Black	40	76m
SEO 8/4 BLK	03465	8/4	4x 8.51	168x0.254	BC 316	23.8	Black	35	76m
SEO 6/3 BLK	03467	6/3	3x13.60	133x0.360	BC 375	25.0	Black	55	76m
SEO 6/4 BLK	03468	6/4	4x13.60	133x0.360	BC 500	28.0	Black	45	76m
SEO 4/4 BLK	03471	4/4	4x21.61	133x0.455	BC 804	32.2	Black	60	304m
SEO 2/4 BLK	03474	2/4	4x34.65	133x0.574	BC 1224	38.8	Black	80	304m