


MOBILE SAFETY PLUGS AND SOCKETS

MOBILE PLUGS AND SOCKETS ACCORDING TO STANDARDS

CEI 23 - 50 + V1

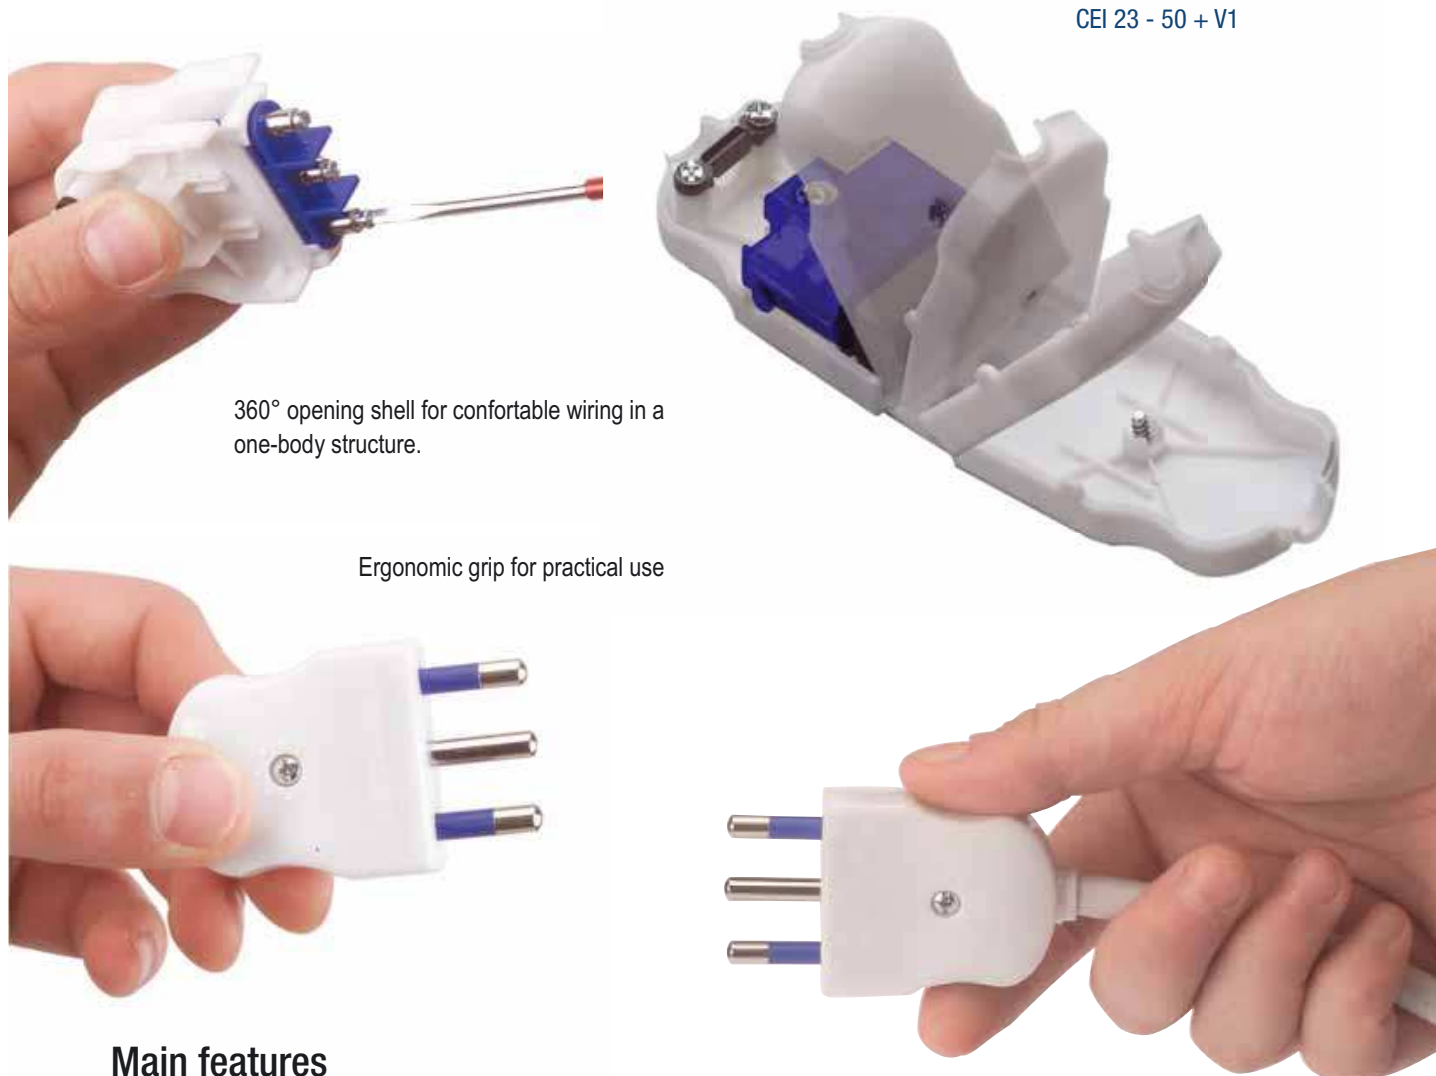

360° opening shell for comfortable wiring in a one-body structure.

Ergonomic grip for practical use

Main features


- Unbreakable plastic body – black or white.
- Protection compartments for individual cables
- Cable clamp
- Plastic support for electrical components (Glow Wire 750 °C)
- SICURY protection against accidental contacts with live parts – 2.1 degree – to CEI 23-16
- Non-loosening screws on terminals
- plugs with:
 - . unlosable pins
 - . active pins with insulating sheath
- sockets with:
 - . elastic cells
 - . active cells screened by an unlosable shutter
 - . earth pin and shutter permanently moulded together

COMPLIANCE WITH
CEI 23-50 (IEC 80884-1)


BE CAREFUL! Cables with a minimum cross section of 0.75 mm² must be used for 10A mobile plugs and sockets. Cables with a minimum cross section of 1 mm² must be used for 16A mobile plugs and sockets.



Nickel-plated pins and screws with anti-corrosion treatment.

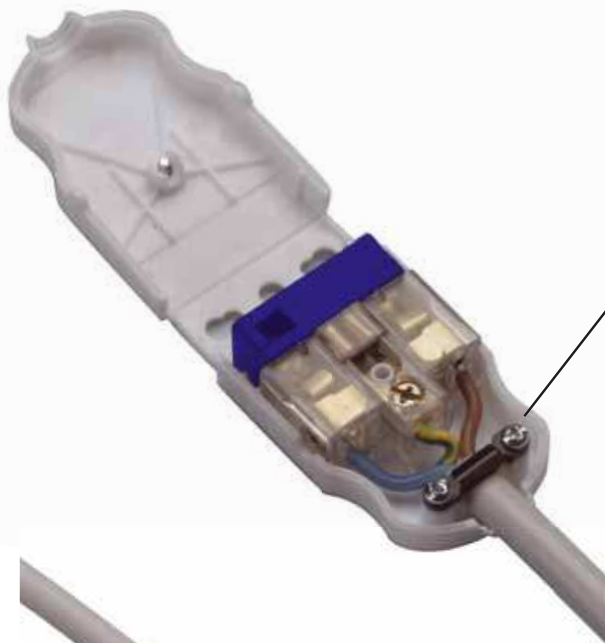

Dimensioned cable-clamps for different sections with adaptable tang. Unloseable terminals situated in special place.









Screws with cut and cross head

MOBILE SAFETY PLUGS COMPACT

MOBILE SAFETY PLUGS COMPACT ACCORDING TO STANDARDS





* CEI 23 - 50 + V1

| Black | White | Description |
|---|---|-------------------------------|
| <p>05010</p>  | <p>05011</p>  | <p>2P 10A COMPACT plug</p> |
| <p>05020</p>  | <p>05021</p>  | <p>*2P+E 10A COMPACT plug</p> |
| <p>05060</p>  | <p>05061</p>  | <p>*2P+E 16A COMPACT plug</p> |

MOBILE SAFETY SOCKETS COMPACT

MOBILE SAFETY SOCKETS COMPACT ACCORDING TO STANDARDS









* CEI 23 - 50 + V1

| Black | White | Description |
|---|---|------------------------------------|
| <p>05210</p>  | <p>05211</p>  | <p>*2P+E 10A COMPACT socket</p> |
| <p>05230</p>  | <p>05231</p>  | <p>*2P+E 10/16A COMPACT socket</p> |

MOBILE SAFETY PLUGS

MOBILE SAFETY PLUGS ACCORDING TO STANDARDS









* CEI 23 - 50

| Black | White | Description |
|---|---|-----------------|
| <p>05110</p>  | <p>05111</p>  | 2P 10A plug |
| <p>05120</p>  | <p>05121</p>  | * 2P+E 10A plug |
| <p>05150</p>  | <p>05151</p>  | 2P 16A plug |
| <p>05160</p>  | <p>05161</p>  | * 2P+E 16A plug |

MOBILE SAFETY PLUGS








MOBILE SAFETY PLUGS ACCORDING TO STANDARDS

* CEI 23 - 50

| Black | White | Description |
|--|--|---|
| <p>05110G</p>  | <p>05111G</p>  | <p>2P 10A plug with rubber cable sheath</p> |
| <p>05120G</p>  | <p>05121G</p>  | <p>* 2P+E 10A plug with rubber cable sheath</p> |
| <p>05150G</p>  | <p>05151G</p>  | <p>2P 16A plug with rubber cable sheath</p> |
| <p>05160G</p>  | <p>05161G</p>  | <p>* 2P+E 16A plug with rubber cable sheath</p> |

MOBILE FLAT PLUGS









MOBILE FLAT PLUGS WITH 90° CABLE OUTLET

| Black | White | Description |
|---|---|--------------------|
| <p>05430</p>  | <p>05431</p>  | 2P 10A flat plug |
| <p>05410</p>  | <p>05411</p>  | 2P+E 10A flat plug |
| <p>05440</p>  | <p>05441</p>  | 2P 16A flat plug |
| <p>05420</p>  | <p>05421</p>  | 2P+E 16A flat plug |

MOBILE SAFETY SOCKETS

MOBILE SAFETY SOCKETS ACCORDING TO STANDARDS

CEI 23 - 50

| Black | White | Description |
|--|--|---|
| <p>05510</p>  | <p>05511</p>  | 2P+E 10A plug |
| <p>05530</p>  | <p>05531</p>  | 2P+E 10/16A plug |
| <p>05510G</p>  | <p>05511G</p>  | 2P+E 10A plug with rubber cable sheath |
| <p>05530G</p>  | <p>05531G</p>  | 2P+E 10/16A plug with rubber cable sheath |

Italy - Mains Line Plugs with Earthing Contact, 10A/250V

Rewirable Mains Line Plug with Earthing Contact, for Supply Line H05VV-F 3G0.75, and 3G1.0mm²

Features

- Unbreakable plastic body – black or white
- Protection compartments for individual cables
- Cable clamp
- Plastic support for electrical components (Glow Wire 750 °C)
- SICURY protection against accidental contacts with live parts – 2.1 degree – to CEI 23-16
- Non-loosening screws on terminals
- Plugs with unlosable pins
- Active pins with insulating sheath
- Standards and Certifications: IMQ, COMPLIANCE WITH CEI 23-50 (IEC 80884-1)




851BK-05120

NOTES:

Cables with a minimum cross section of 0.75 mm² must be used for 10A mobile plugs and sockets.



| Catalog Number* | Color | Description | EDP-No. |
|---|-------|---|---------------|
| 851BK-05120 | Black | Rewirable Plug, Italy 2P+E, 10A/250V AC | 125027 |
| 851WH-05121 | White | Rewirable Plug, Italy 2P+E, 10A/250V AC | 125028 |
| * Available with rubber cable sheath, (add. suffix „G“ to Catalog Number, e.g. 851BK-05120G). Further Plugs and Connectors are available, see Documentation, or contact our sales office for additional informations. | | | |

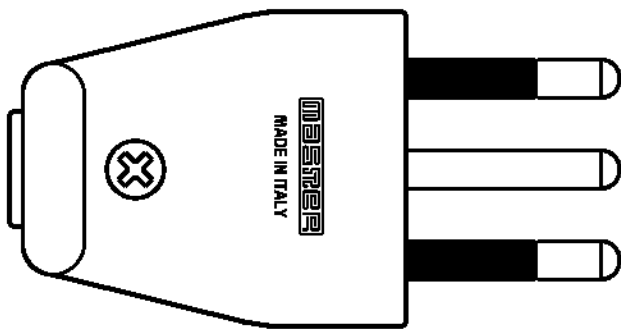

05120/21

Dimensions in mm

Jacket Accepted
Ø 9.0 max.

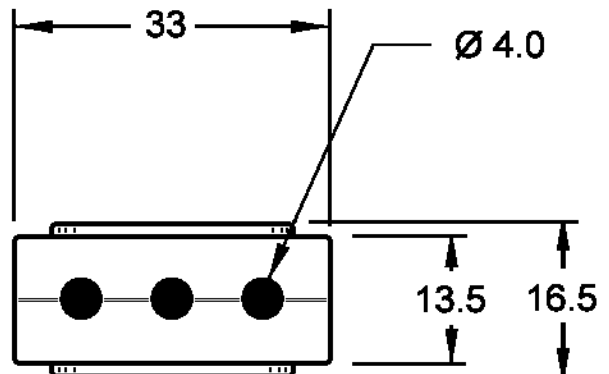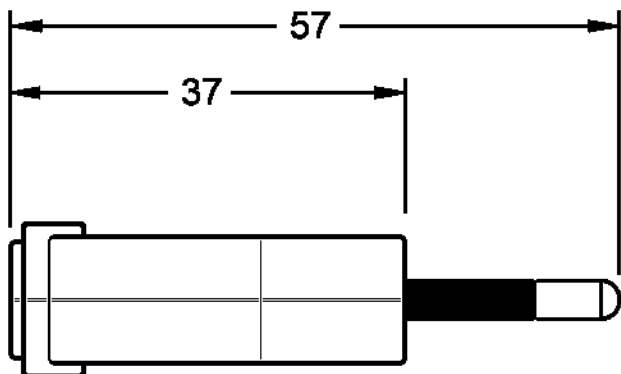


Italy - Mains Line Plugs with Earthing Contact, 16A/250V

Rewirable Mains Line Plug with Earthing Contact, for Supply Line H05VV-F 3G1.0, and 3G1.5mm²

Features

- Unbreakable plastic body – black or white
- Protection compartments for individual cables
- Cable clamp
- Plastic support for electrical components (Glow Wire 750 °C)
- SICURY protection against accidental contacts with live parts – 2.1 degree – to CEI 23-16
- Non-loosening screws on terminals
- Plugs with unlosable pins
- Active pins with insulating sheath
- Standards and Certifications: IMQ, COMPLIANCE WITH CEI 23-50 (IEC 80884-1)

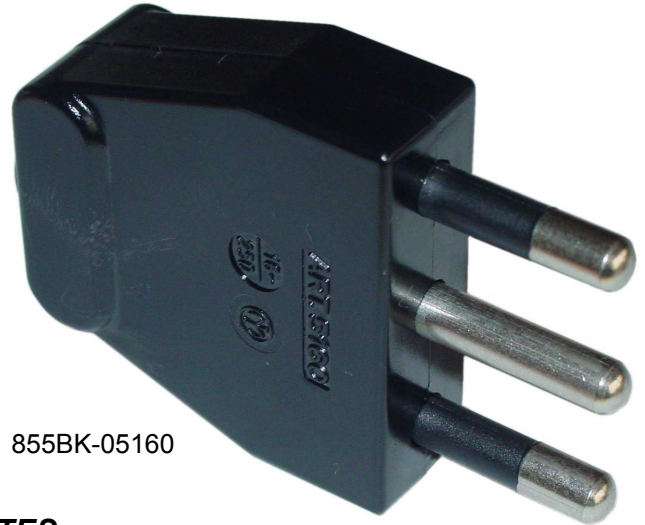


855BK-05160

NOTES:

Cables with a minimum cross section of 1 mm² must be used for 16A mobile plugs and sockets.

| Catalog Number* | Color | Description | EDP-No. |
|---|-------|---|---------|
| 855BK-05160 | Black | Rewirable Plug, Italy 2P+E, 16A/250V AC | 125025 |
| 855WH-05161 | White | Rewirable Plug, Italy 2P+E, 16A/250V AC | 125026 |
| * Available with rubber cable sheath, (add. suffix „G“ to Catalog Number, e.g. 855BK-05160G). Further Plugs and Connectors are available, see Documentation, or contact our sales office for additional informations. | | | |

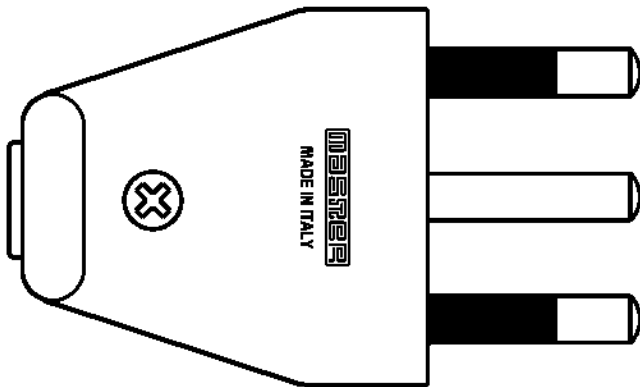

05160/61

Dimensions in mm

Jacket Accepted
Ø 11.0 max.

