

4792




L5-15R



5-15R

Dimensions = mm

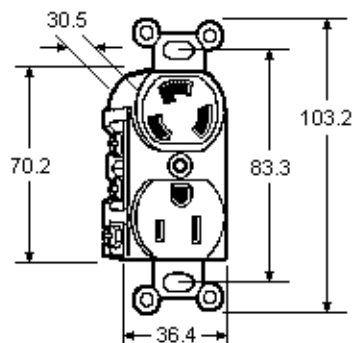

Combination Straight Blade and Locking Receptacles, 125 Volt 15 Amp, NEMA 5-15R and L5-15R, 2-Pole 3-Wire Grounded, UL Listed to meet/exceed UL 498 standards (UL File #E13399), CSA Certified (CSA File #LR406).

In accordance with the NEC, these devices are suitable for use in all 15 amp. branch circuits of 125 volts for applications in which both a straight-blade and locking receptacle in a single-gang box are required and where the unwanted disconnection of power supply cords or extension cord sets from locking receptacles cannot be tolerated; extended electrical and mechanical life is desirable; and, resistance to impact, abrasion, solvents, oil, greases and acids is required. - Please request for more informations !!!

Cat. No.	Description	Wght/ea	UPE/Pack	EDP-No
4792	Duplex Combination Receptacle with 1 feed, 1 neutral return, back and side-wired	118g	100/10	115093
4794	as above - with 2 feeds, 1 neutral return	118g	100/10	115094
4795	as above - with 2 feeds, 2 neutral return	118g	100/10	115095