

77505

CLEANING

Surface cleaning with a cloth
Do not use: acetone, tar remover, trichloroethylene.

Resistance to cleaning agents

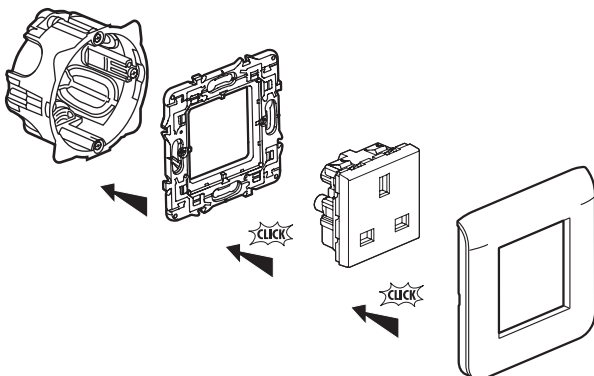
Resistance to the following agents: Hexane (EN60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Resistance to hospital-type cleaning agents

Resistance to the following agents : Anios, Surfianios, Bactily sine, Diluted hydrogen peroxide (35%).

Caution:

A preliminary test should be carried out if other specific cleaning products are to be used.

PREPARATION**DESCRIPTION**

Modular socket outlet to British Standard BS1363 2P+E
Number of modules: 2
Characteristics: 13A, 250V

Connection

Connection method: With screw terminals
Terminal capacity: 2x 4 mm²
Wire stripping: 9 mm stripping guide
Screwdriver: cross-head 2 or 4 mm flat-blade

Operation

Standard operation by insertion or withdrawal of a plug to normalize standard.

TECHNICAL CHARACTERISTICS**Mechanical characteristics**

Impact resistance: IK 04
IP 41 (C15100)

Material characteristics

Cover plate: Polycarbonate
Base: Polycarbonate
Self-extinguishing: 650°C / 30 s

Climatic characteristics

Storage temperatures: -10°C to +70°C
Operating temperatures: -5°C to +50°C

CONFORMITY - APPROVALS

Approvals in process:
Cat. No. 77505: ASTA

OVERALL DIMENSIONS (mm)