


WIRE MANAGEMENT PRODUCTS

FLEXIBLE, LIQUID-TIGHT PVC TUBING FNT

**UL RECOGNIZED
CSA CERTIFIED**

CHOOSE FLEXIBLE LIQUID-TIGHT PVC TUBING FOR:

- Resistance to Oil, Water, Corrosion and Ultraviolet Light
- Flexing/Vibration
- Protection from Stretching, Pulling or Tangling
- Uses Liquid-Tight Connectors SLC or RLC

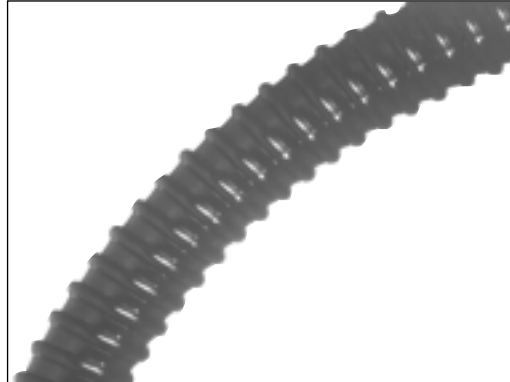

FLEXIBLE LIQUID-TIGHT PVC TUBING:

(FNT) system of wire management products for electronic and electrical wire protection provides maximum flexibility and can be used in extremely tight quarters. Excellent for general applications where maximum flexibility is required. Ideal in areas where movement, vibration or flexing is a problem.

FLEXIBLE LIQUID-TIGHT PVC TUBING APPLICATIONS:

- Fiber Optic Cable Protection
- Wire Harness Protection
- Flexible Cable Applications



CHARACTERISTICS

OPERATING TEMPERATURE:

- 70°C (UL)
- -18°C to 60°C (CSA)

COLOR DESCRIPTION:

- All Standard Package: Black

CHEMICAL PROPERTIES:

- Resists Corrosion, Oil and Water
- UV Resistant

SPECIFICATIONS

- UL Recognized
- CSA Certified (except for 1/4" size)



Part No.	Trade Size Inches	Outside Diameter		Inside Diameter		Standard Put-Up Ft.
		Minimum Inches	Maximum mm	Minimum Inches	Maximum mm	
FNT-1/4	1/4	0.560	14,2	0.575	14,6	0.385 9,78 0.405 10,3 25, 100
FNT-3/8	3/8	0.690	17,5	0.710	18,0	0.484 12,3 0.504 12,8 25, 100
FNT-1/2	1/2	0.820	20,8	0.840	21,3	0.622 15,8 0.642 16,3 25, 100
FNT-3/4	3/4	1.030	26,1	1.050	26,7	0.820 20,8 0.840 21,3 25, 100
FNT-1	1	1.290	32,8	1.315	33,4	1.041 26,4 1.066 27,1 25, 100
FNT-1-1/4	1-1/4	1.630	41,4	1.660	42,2	1.380 35,1 1.410 35,8 25, 100
FNT-1-1/2	1-1/2	1.865	47,4	1.900	48,3	1.575 40,0 1.600 40,6 25, 50
FNT-2	2	2.340	59,4	2.375	60,3	2.020 51,3 2.045 51,9 25, 50