

USA / Canada - Rigid and IMC Bullet® Hub Connectors


Rigid and IMC (Intermediate Metal Conduit) Fittings

UL Listed raintight and CSA Certified watertight and dusttight.

Steel/Malleable Iron and Aluminum Bullet® Hub Connectors^{1,2}

Product Data

- Available from 1/2" to 6" in steel/malleable iron (steel through 1") with nylon-insulated throat — optional bonding locknut available.
- Also available from 1/2" to 2" in aluminum without insulated throat. Contact Sales Office.
- When used with neoprene O-ring, provides watertight threaded hub on enclosures.
- UL Listed 105°C.
- Electro zinc plated finish.
- Look for the unique blue color ensuring the highest quality fitting.

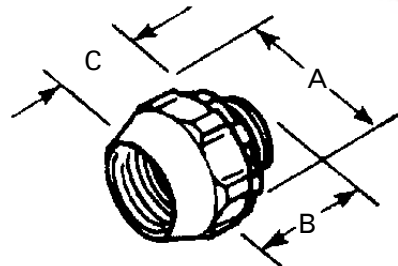

Representative image shown with optional locknut.



Application

- To connect threaded metal conduit (ferrous rigid/non-ferrous rigid/PVC coated/or intermediate metal) to a threadless opening in a box or enclosure in outdoor or indoor location exposed to continuous or intermittent moisture.
To positively bond conduit to box or enclosure.

Catalog Number	Hub Trade Size (Inches)	Dimensions Inches (mm)			Max. Wall Thickness Inches (mm)
		A	B	C	
370	1/2"	1 3/8" (34.9)	1 1/4" (31.8)	3/4" (19.1)	5/16" (7.9)
371	3/4"	1 5/8" (41.3)	1 1/4" (31.8)	3/4" (19.1)	5/16" (7.9)
372	1"	2 3/32" (53.2)	1 3/8" (34.9)	7/8" (22.2)	5/16" (7.9)
373	1 1/4"	2 9/16" (65.1)	1 5/8" (41.3)	1" (25.4)	5/16" (7.9)
374	1 1/2"	3 3/32" (78.6)	1 5/8" (41.3)	1" (25.4)	5/16" (7.9)
375	2"	3 5/8" (92.1)	1 5/8" (41.3)	1" (25.4)	5/16" (7.9)
376	2 1/2"	4 1/8" (104.8)	1 7/8" (47.6)	1 1/8" (28.6)	3/8" (9.5)
377	3"	5" (127.0)	2 1/2" (63.5)	1 1/2" (38.1)	1/2" (12.7)
378	3 1/2"	5 9/16" (141.3)	2 1/2" (63.5)	1 1/2" (38.1)	1/2" (12.7)
379*	4"	6 3/16" (157.2)	2 1/2" (63.5)	1 1/2" (38.1)	1/2" (12.7)
381*	5"	8" (203.2)	3 1/8" (79.4)		1/2" (12.7)
382*	6"	9 3/16" (233.4)	3 1/8" (79.4)		1/2" (12.7)

* Please check availability (if existing stock is deplete, items will be discontinued).

¹ Suitable for hazardous locations use in Class I, Div. 2; Class II, Div. 2; Class III, Div. 1 and 2 where general purpose equipment is specifically permitted per NEC Section 500-2(a).

² UL Listed rain tight and CSA Certified watertight and dust tight

Available with DURA-PLATE® finish.

UL File No. E23018, For Steel.: CSA File No. 2284, For Aluminum.: CSA File No. 0637

Technical Data and Specifications are Subject to Change without Notice. Dimensions in mm.