


Australia - Non-Detachable Power Supply Cords

SPECIFICATIONS

- Molded PVC male plug.
- Straight, with flex strain relief.
- Plug Standard: AS 3112
- Standard bulk packaged
- Approvals: SAA
- Molded PVC over nylon insert, straight male grounding plug with flex type strain relief. Nickel-plated brass solid blades.

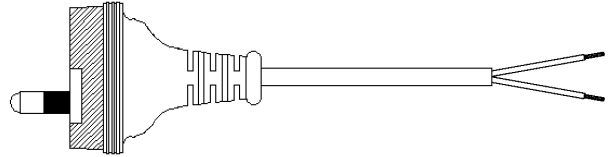

Molded Grounding Plug AS 3112 see below

Remove Outer Jacket Striped and Twisted 2nd End see below

Catalog No.*	Rating	Color	Plug No.	Wire Type	Color ¹	Nominal ø	2nd End	VPE/Pack	EDP-No.
8220-25M-BB	7.5A-250V	Black	UC-821	H03VV-H2F 2x0.75	CEE	1.3/6.6mm	50/12mm	100 ea	120410

* Catalog No. indicates: **Series - Length Code - Color Code** (e.g. BB = all Black, GG = all Gray)

¹ Conductor Color Code: CEE = Brown, Blue

- Part Number: **UC-821**
- Configuration: AS3112
- Description: Molded Plug
- Ratings: 10A/250V
- Approvals: SAA
- Wire Type(s): PARALLEL TWIN, LIGHT DUTY FLAT AND ROUND 2X0.75MM²
 ORD DUTY FLAT AND ROUND 2X0.75MM², 2X1.0MM²
 HO3VVH2-F 2X0.75MM²
 HO5VVH2-F 2X0.75MM²
 HO3VV-F 2X0.75MM²
 HO5VV-F 2X0.75MM², 2X1.0MM²
 HO7RN-F 2X1.0MM²
- Features: Molded PVC over nylon insert, straight male plug with flex type strain relief.
 Nickel-plated brass solid blades.

