

**China - Non-Detachable Power Connector, C13, Straight**



Catalog No. : UC-052

Standard : Chinese GB 1002

Ratings : 10A, 250V AC

Applications : For Class I Equipment

China, Peoples Republic of

Available with Cords:




H05VV-F

RVV 300/500V

| Cordage Type | Jacket Material | Conductor Size (mm <sup>2</sup> ) | No. of Cond. | Insulation Material | Stranding (pcs/mm) | Insulation (mm) Thickness | Jacket (mm) Thickness / O.D. | Temp. Ratings |
|--------------|-----------------|-----------------------------------|--------------|---------------------|--------------------|---------------------------|------------------------------|---------------|
| H05VV-F      | PVC             | 1.00                              | 3            | PVC                 | 32 / 0.210         | 0.60                      | 0.80 / 7.0                   | 70°C          |
| RVV 300/500V | PVC             | 1.00                              | 3            | PVC                 | 32 / 0.200         | 0.60                      | 0.80 / 6.8                   | 70°C          |

**Dimensional Data:**

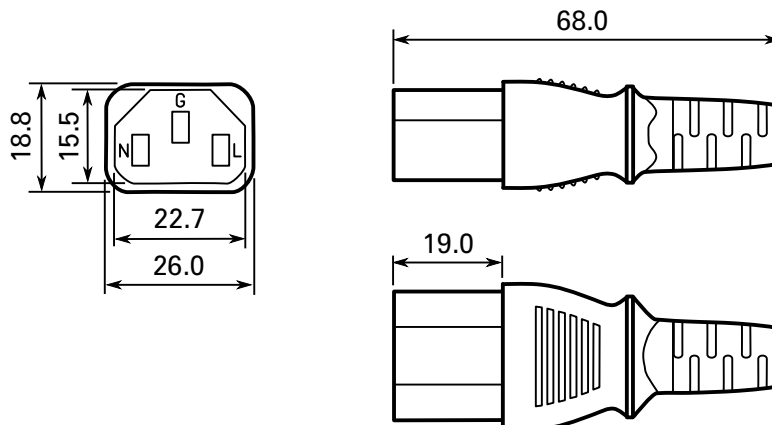

Dimensions in mm