


BS88, IEC269 Industrial HRC Fuse Links
Offset Bolted Tags 550V ac 2-32 Amps


AAO

Time-Current Characteristic Curves


Non Motor Rated

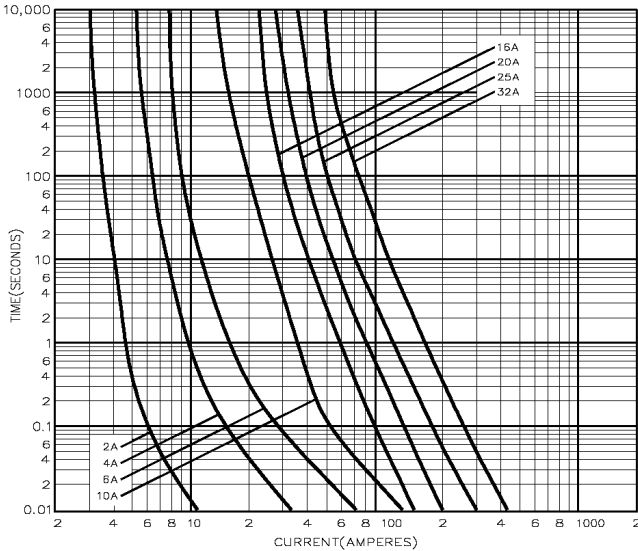


Motor Rated

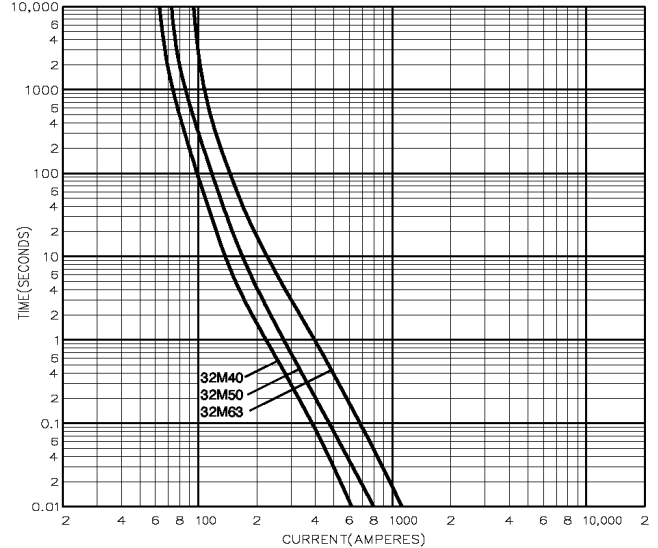

Dimensional Data



Offset Bolted Tag

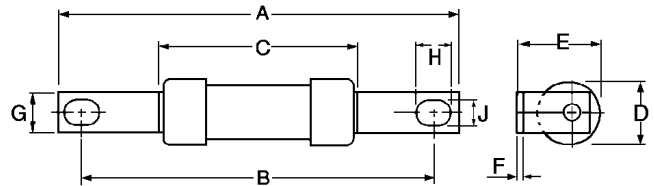

Catalog' Number	Pt (Amps ² Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
AAO2	2	1.4	4.7	0.9	550 ac	85.0	73.5	35.5	13.7	14.0	1.2	8.7	8.0	5.5
AAO4	4	7.8	26	1.4										
AAO6	6	28	100	1.8										
AAO10	10	125	400	2.1										
AAO16	16	120	470	1.8										
AAO20	20	260	1000	1.8										
AAO25	25	570	2300	2										
AAO32	32	710	3000	2.9										
AAO32M40	32M40	1400	3800	3				54.5	21.0	22.3				
AAO32M50	32M50	3000	8500	2										
AAO32M63	32M63	7000	18000	1.4										

Packaging - 20 per carton

AAO 03.98
 Doc. No.4109