



Model YP-80 (16A)

- **Standard:** IEC 60884-1
- **Ratings:** 16 Amp, 250 Volt AC
- **Applications:** For use with Class I Equipment
- **Safety and Regulations:** BIS, SABS
- **Environmental Compliance:** RoHS, REACH
- **Target Countries:** India, South Africa

The conductor cross-sections are 0.75mm², 1.0mm², or 1.5mm² according to the required amperage.

The following table provides additional cable information for the molded mains plug presented here.


South Africa – Available with Cords

Wire Size	Wire Type	Ratings
0.75 X 2C	H03VVH2-F, H05VVH2-F, H03VV-F, H05VV-F	16A 250V
1.0 X 2C	H05VVH2-F, H05VV-F	
0.75 X 3C	H05VV-F	
1.0 X 3C	H05VV-F	
1.5 X 3C	H05VV-F	


India – Available with Cords

Wire Size	Wire Type	Ratings
0.75 X 3C	YY CIRCULAR	16A 250V
1.0 X 3C	YY CIRCULAR	
1.5 X 3C	YY CIRCULAR	

Plug Dimensions

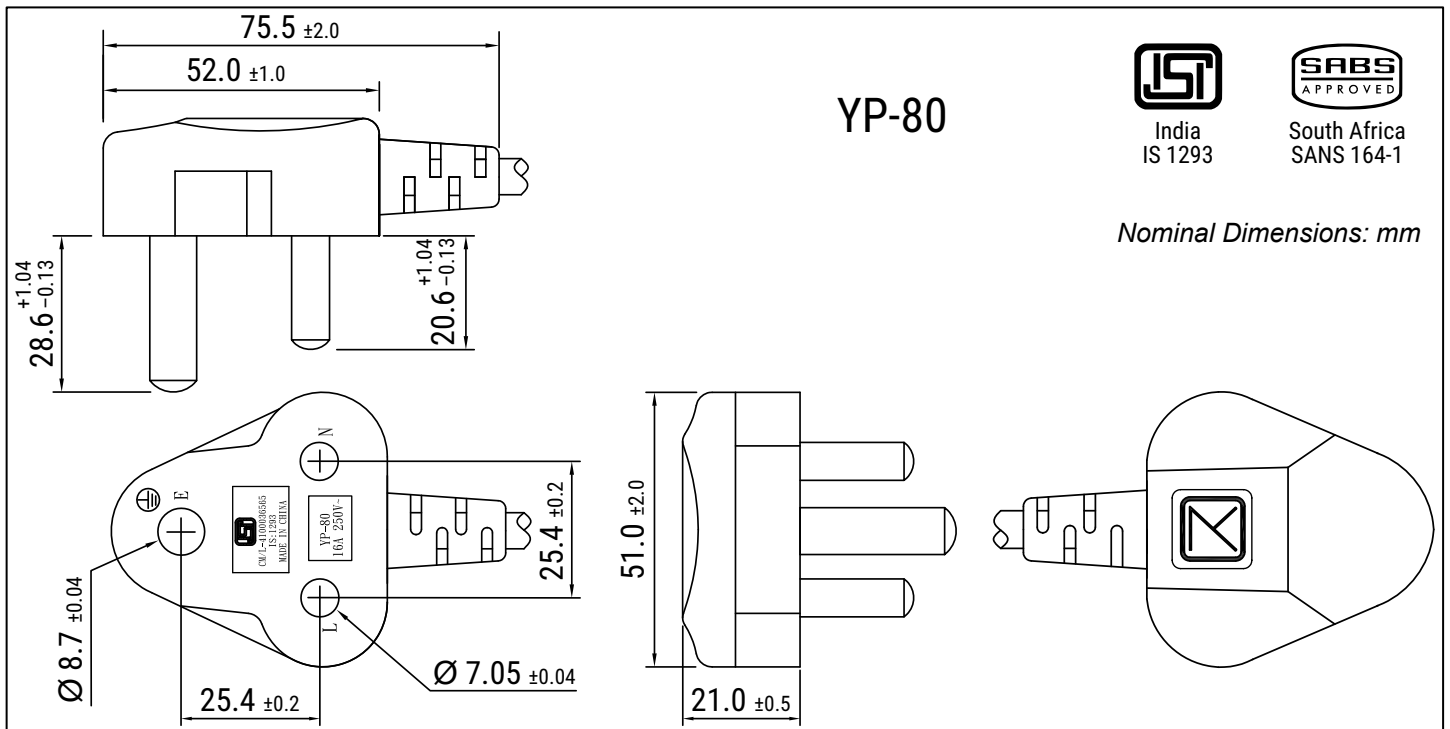

The most popular IEC 60320 electrical appliance couplers

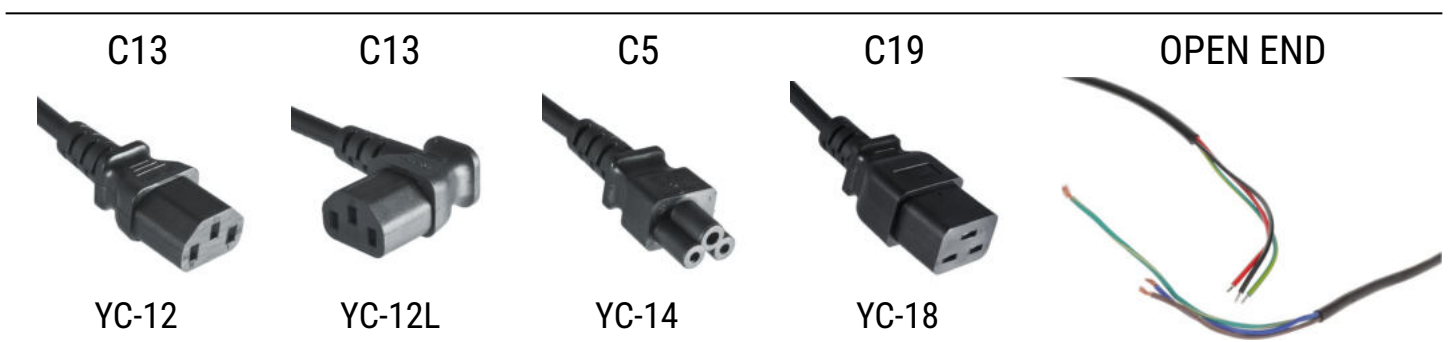

If you cannot find your desired power cord here, please contact our sales office to get an offer for a made-to-order product from a minimum quantity of 500 pieces. The production lead time will be approx. 14 weeks after receipt of the purchase order. Specifications are subject to change without notice.