


Cat. No's indicates products of different manufacturers available.

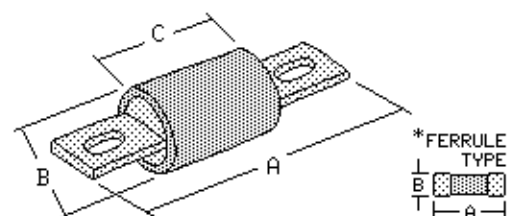

Indicated dimensions only refer to first catalog number listed.

UL

130 V AC

Very Fast
Acting
superflink

SEMICONDUCTOR FUSES

Interrupting rating AC
100,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 0.5 - 6000 Amp.					UPE Packed	Dimensions = mm		
	A	B	C						
L15S	10	15	20	25	30	10	38.1	10.3	*FER
KAA	35	40	45	50	60	10	50.8	20.6	*FER
A13X CSF15X SF13X	70	100	200	400	450	10	67.5	25.4	29.4

NOTE: Intermediate & Further Amp. Sizes upon Request