


Cat. No's indicates products of different manufacturers available.

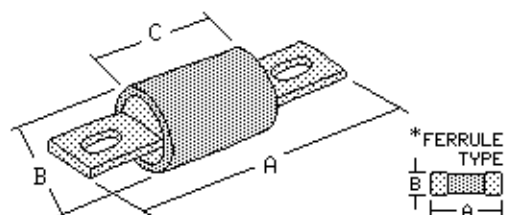

Indicated dimensions only refer to first catalog number listed.

UL

Very Fast

700 V AC

Acting

650 V DC

superflink

#### SEMICONDUCTOR FUSES

Interrupting rating AC  
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 1 - 1600 Amp.					UPE Packed	Dimensions = mm		
	A	B	C	A	B		C		
L70S	10	15	20	25	30	10	50.8	14.3	*FER
KBP	35	40	50	60		5	111.1	25.4	73.0
A70P									
CSF70P	70	80	90	100		5	111.1	31.0	73.0
XL70F									

NOTE: Intermediate & Further Amp. Sizes upon Request