


Cat. No's indicates products of different manufacturers available.

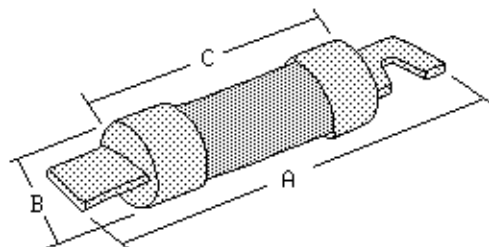

Indicated dimensions only refer to first catalog number listed.

UL 198E/L CSA ■ HRCI-R

250 V AC

125 V DC

Time Delay

UL Class RK5 träge

Interrupting rating AC
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 70 - 600 Amp.					UPE Packed	Dimensions = mm		
	A	B	C						
FLNR ■	70	80	90	100		5	149.2	27.0	95.2
FRNR ■	110	125	150	175	200	1	181.0	40.5	106.4
TR-R ■									
CRNR ■	225	250	300	350	400	1	219.1	53.2	120.7
ECNR ■									
	450	500	600			1	263.5	65.9	142.9