


Dimensions
refer to
Class H
Holders

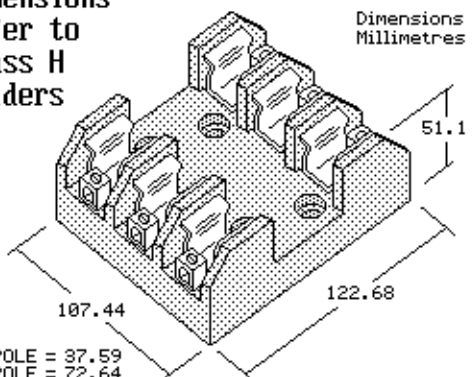

UL CSA■
250V AC 31-60A

Class R Holders
Tested & Approved
for 200.000 Amp.
Interrupt.Capacity

FUSE HOLDERS, suitable for Class H, K and R* Fuses (*or use Class R Holders)

- Base, High Impact Thermoplastic, 125°C
- Patented Cool Clip(R) Design
- Clip, Copper Alloy, Tin Plated

Fuse Size:
(Ø 20.6 x 76.2)mm

No.of Poles	Catalog Numbers		Class R only	Wire Connector	Copper Wire Range (AWG)	UPE Packed
	Standard	Reinforced				
1	F60A1SQ■	RF60A1SQ■	R60A1S■	Screw Connector	10 - 22	50
2	F60A2SQ■	RF60A2SQ■	R60A2S■	Screw Connector	10 - 22	25
3	F60A3SQ■	RF60A3SQ■	R60A3S■	Screw Connector	10 - 22	20
1	F60A1B■	RF60A1B■	R60A1B■	Box Connector	2 - 14	50
2	F60A2B■	RF60A2B■	R60A2B■	Box Connector	2 - 14	25
3	F60A3B■	RF60A3B■	R60A3B■	Box Connector	2 - 14	20