


## United Kingdom - Industrial HRC Fuse Links, BS88-A4, CEO

### SPECIFICATIONS

- BS88-A4 Industrial HRC Fuse, IEC269
- Offset Bolted Tags
- Maximum Voltage 550V AC, and Motor Rated 415V AC


### Catalog Numbers:

CEO32	CEO100
CEO40	CEO100M125
CEO50	CEO100M160
CEO63	CEO100M200
CEO80	



Offset Bolted Tag

Dimensional Data

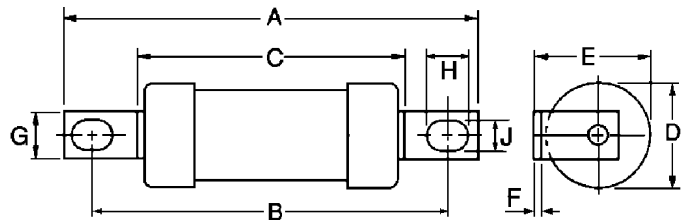


Catalog Number	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
CEO32	32	1000	2760	3.5	550 ac	110	94.0	58.5	21.0	24.5	3.2	14.3	11.0	8.7
CEO40	40	1400	3750	4.7										
CEO50	50	3000	8350	4.9										
CEO63	63	7000	18,800	5.6										
CEO80	80	13,000	35,200	7.2										
CEO100	100	25,000	76,500	8.5	415 ac	110	94.0	58.5	25.8	26.8	3.2	14.3	11.0	8.7
CEO100M125	100M125	57,000	150,000	6.5										
CEO100M160	100M160	72,500	190,000	5.0										
CEO100M200	100M200	120,000	290,000	3.5					54.5	31.0				

Packaging - 10 per carton except CEO100M200 which is packed 5 per carton

### Time-Current Characteristic Curves

Non Motor Rated

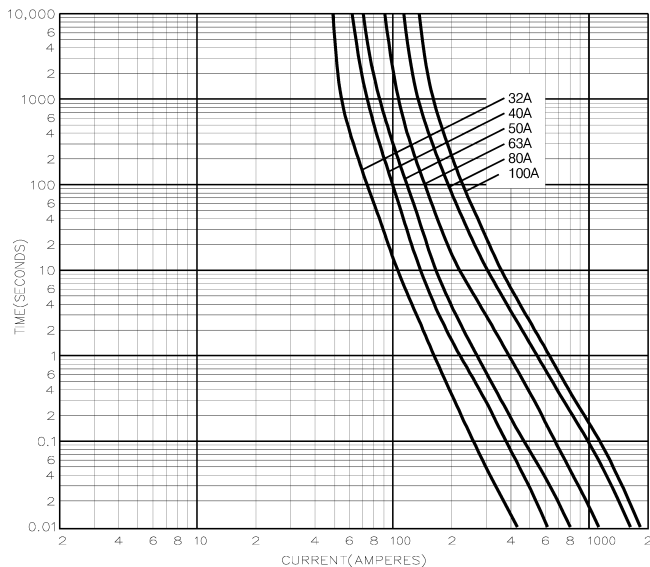

Motor Rated

