

HANDY BOXES

1-1/2" AND 1-7/8" DEEP

Applications


- Handy Boxes, also called utility boxes, are used for convenience outlets, switch boxes or small junction boxes
- They are popular for exposed work applications (surface mounted wiring)
- The NEC requires that surfacemounted wiring be enclosed with a protective covering such as EMT conduit

Product Features


- We offer a variety of labor saving mounting brackets that allow for easy positioning of box along studs or joists
- See Box Selection section in the front of this catalog for complete description of bracket types and features


Compliances

- (UL) File E195978
- 🕞 File LR-1082 (611 only)



STEEL HANDY BOXES



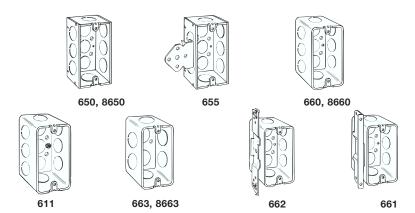

ORDERING INFORMATION - DIMENSIONS

4" x 2" HANDY BOXES - 1-1/2" DEEP - WELDED With Conduit Ko's - 11.5 Cubic Inches						
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD.	UPC Bar
		SIDES	ENDS	BOTTOM	PKG.	CODE
650	_	6-1/2"	2-1/2"	3-1/2"	50	_
8650	_	6-1/2"	2-1/2"	3-1/2"	50	
655	B brkt., 1/4"	3-1/2"	2-1/2"	3-1/2"	50	_

4" x 2" HANDY BOXES - 1-7/8" DEEP - DRAWN With Conduit Ko's - 13.0 Cubic inches							
CATALOG	DESCRIPTION Bracket & Setback	KNOCKOUTS			STD.	UPC BAR	
NUMBER		SIDES	ENDS	воттом	PKG.	CODE	
660	_	6-1/2"	2-1/2"	3-1/2"	50	_	
8660	_	6-1/2"	2-1/2"	3-1/2"	50		
611	Ground screw incl.	6-1/2"	2-1/2"	3-1/2"	50	_	
663	_	4-3/4"	2-3/4"	2-3/4"	50	_	
8663	_	4-3/4"	2-3/4"	2-3/4"	50		
662	TS brkt., 1/2"	3-1/2"	2-1/2"	3-1/2"	50		
661	A brkt., 5/8"	3-1/2"	2-1/2"	3-1/2"	50		

DIMENSIONS						
CATALOG NUMBER	А	В	С			
650, 8650	1-1/2"	_	_			
655	1-1/2"	_	_			
660, 8660	1-7/8"	_	_			
611	1-7/8"	_	_			
663, 8663	1-7/8"	_	_			
662	1-7/8"	7"	2-3/8"			
661	1-7/8"	6-7/16"	2-11/32"			